


Technical detail

Dutch door 44 mm (1 ¾") solid core

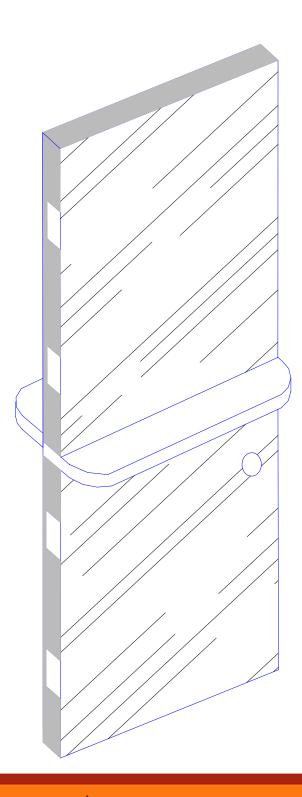

- Stiles: Choice of architect (Series 4100, 4200, 4300, 4400, 4500)
- Core of solid chipboard. density 28 pounds per cubic foot (449 kg per cubic meter). Conforms to CSA 0188. Shim for integrated lock.
- Faces plywood to choose from: cherry paint, white birch, maple, lauan, oak, high-density rigid panel.
- Tabelle cherry, oak or maple laminated 1 1/4" thick. Available widths: 8", 10" and 12"

Site web: www.mdpins.qc.ca

Fax: (450) 677-3946