




Door 44 mm (1 3/4") Leaded

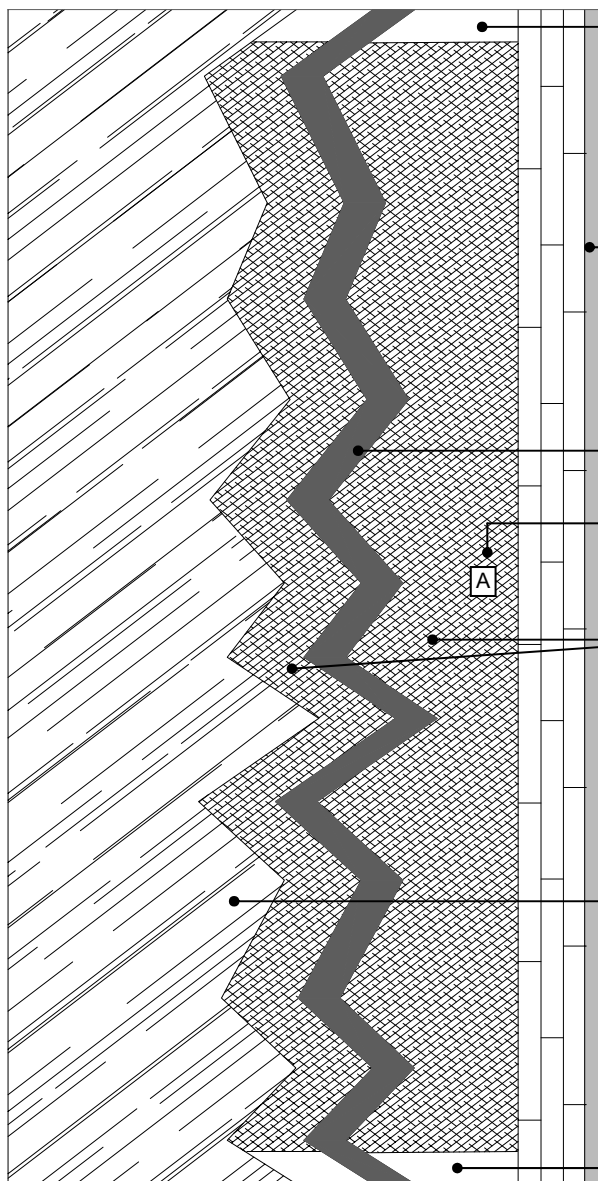

Upper beam 1 1/8" (28.6 mm) low-density wood jointed.

Beating 4 1/4" (108 mm) including a laminated piece of hardwood 5/8" (16 mm) thick, the choice of the manufacturer or paired with the requested face. Shim for integrated lock.


A lead sheet in 1/32", 1/16" and 1/8" bonded under pressure to the center covering the entire surface of the door.

Laminated wood core.

Plywood sides to choose from: cherry paint, white birch, maple, lauan, oak, high-density rigid panel.

Bottom rail of 1 1/8" (28.6 mm) low-density wood jointed.

VIEW A - A

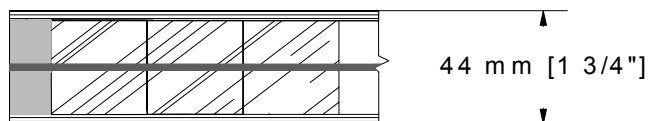

USINE ET SIÈGE SOCIAL

3150, Chemin Royal, Notre-Dame des Pins
Beauce (Québec) G0M 1K0
Tél. : (418) 774-3324 · Fax : (418) 774-5530
Site web : www.mdpsins.qc.ca

SUCCURSALE LONGUEUIL

961, boulevard Guimond
Longueuil (Québec) J4G 2M7
Tél. : (450) 677-5211 · 1 (800) 361-5211
Fax : (450) 677-3946